

ExoTec™  
FACADE PANEL



ExoTec

FACADE PANEL





# ExoTec

## FACADE PANEL

### JOINTED PANEL PERFECTION

ExoTec™ Facade Panels provide a durable, expressed joint panel appearance for building facades and fascias. Not only is it a cost-effective and durable exterior building product, it will give an effortless jointed panel look with an ultra-modern feel.

ExoTec™ Facade Panels are suitable for use even on high-rise buildings exposed to extreme wind pressure and other weather elements so you know that it will protect your home. Made from high-density fibre cement, it can be used for commercial and residential properties anywhere in New Zealand. Install using the ExoTec Top Hat system and add greater stability to your building.

The Top Hat Rainscreen fixing method offers versatility to architects and builders which is demonstrated by the variety of design styles that can be achieved including vertical, horizontal or brick pattern panel layout.

A wide range of decorative finishes can be used, from site applied acrylic textures, to factory applied polyurethane plain colours and metallic finishes provided by some specialist applicators.





# What is Fibre Cement?

---

Engineered for durability, fibre cement is resistant to fire and damage from moisture and rotting, making it the ideal low maintenance alternative to traditional cladding materials. Fibre Cement offers both contemporary and flexible design options and is used by many New Zealanders to create stunning facades.

The simple combination of locally sourced wood cellulose fibre, sand, cement and water, give the product its strength to stand the test of time.

# Profiles

---

## RESIDENTIAL APPLICATION


To create a contemporary look with an industrial twist, use ExoTec Facade Panels on your home. The panels add graphic lines and look great paired with the horizontal lines of James Hardie Weatherboards.



## Sheet SIZES

---

LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)
2400	1190	9
3000	1190	9

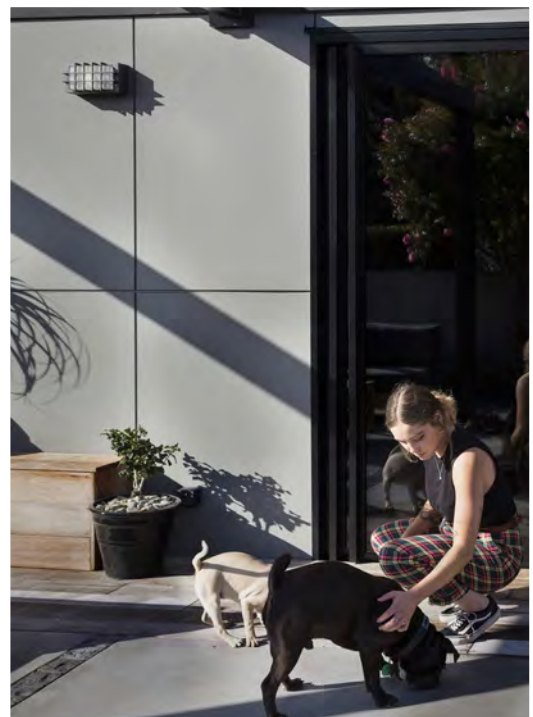





# Features

## & BENEFITS

---



### WEATHER RESISTANT

Engineered to stand up to harsh conditions, including coastal conditions



### WIND RESISTANT

When installed over ExoTec Top Hats it will withstand wind pressures up to 5kPa (ULS)



### FIRE RESISTANT

ExoTec Facade Panel is fire resistant and classified as a non-combustible material



### COST EFFECTIVE

Cost effective and long lasting



### LOW MAINTENANCE



### 15 YEAR WARRANTY

Backed with a 15 year product warranty



### RESISTANT TO DAMAGE FROM MOISTURE

Resistant to damage from moisture and rotting



### EASY TO INSTALL

Quick installation using Top Hat sections



### EASY TO CLEAN

Fast and effective using low pressure water and a brush







# Care

## & MAINTENANCE

---

With minimal maintenance you can keep your home looking like new. The following are the best practices for this product to improve its longevity and performance.

- Washing down your exterior every 6-12 months using low pressure water and a brush, and every 3-4 months in extreme coastal conditions (such as high winds and sea spray)
- Clean out your gutters, downpipes and overflow pipes as required
- Cut back vegetation and landscaping which is too close to or touching the ExoTec Facade Panel
- Re-applying exterior protective finishes. Always refer to the paint manufacturer for wash down and re-coating requirements
- Maintaining the exterior envelope and connections including joints, penetrations, flashings and sealants
- The clearances between the bottom edge of the ExoTec Facade Panel and the ground must always be maintained



# Exotec

FACADE PANEL

[jameshardie.co.nz](http://jameshardie.co.nz)



For more information, warnings and warranties please see our website and review the relevant installation and technical guides. Copyright ©2019 James Hardie New Zealand Limited 0800 306 868  
™ and ® denotes a trademark and registered mark owned by James Hardie Technology Ltd.