


Axon[™] Panel





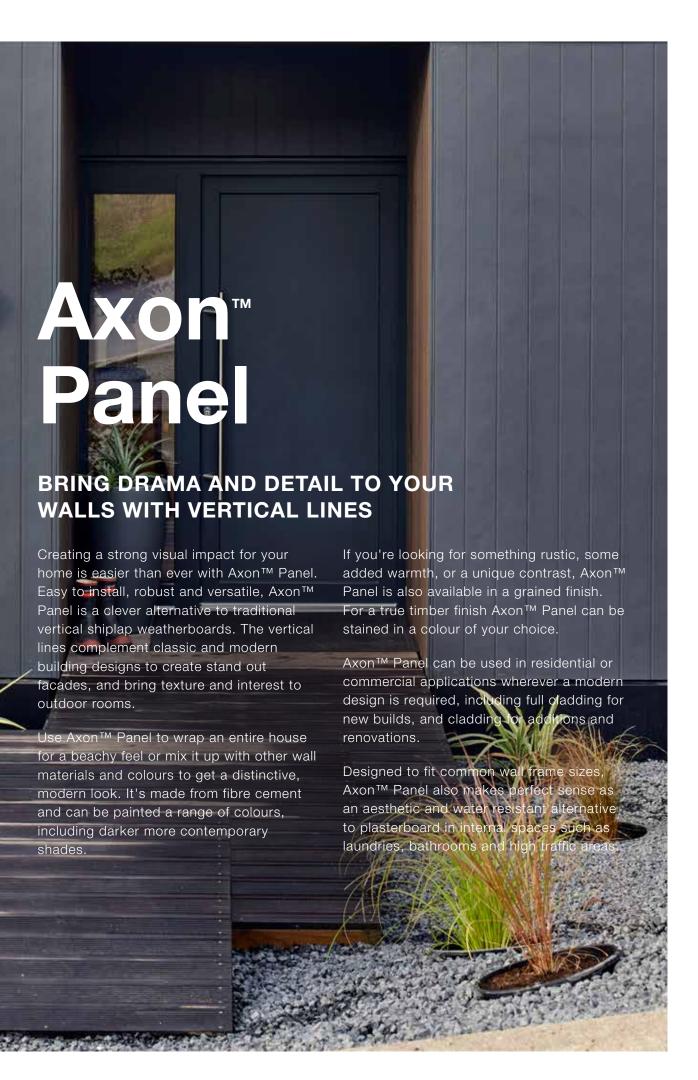

What is fibre cement?

Engineered for durability, fibre cement is resistant to fire, rot resistant and resistant to moisture damage, making it an ideal low maintenance building material. Fibre cement offers both contemporary and flexible design options and is used by many New Zealanders to create stunning facades.

The simple combination of wood cellulose fibre, sand, cement and water, give the product its strength to stand the test of time.

Profiles & Sizes



Axon™ Panel's grainy, wood-like texture contrasts well with a smooth flooring surface and can help bring a softer touch to your modern outdoor space.

*Only available in 3000mm x 1200mm x 9mm




The vertical lines of Axon™ Panel combined with its smooth finish help create a clean and distinctive design look. Available in three sizes.

400mm SMOOTH

Got a bigger area to clad? With its subtle joins, this larger format panel is perfect for larger walls and surfaces, creating an almost geometric feel to your exterior. Available in three sizes.

LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)
2450	1200	9
2750	1200	9
3000	1200	9

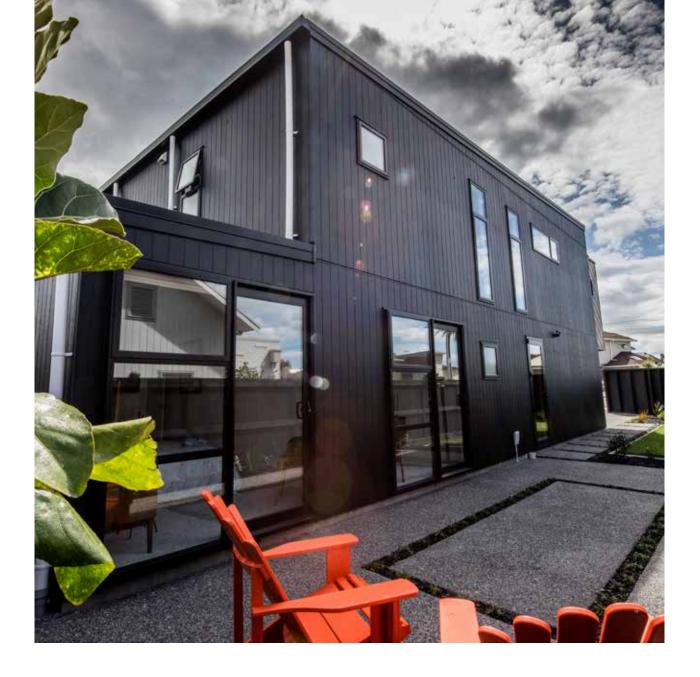

Features & Benefits



WEATHER RESISTANT

Engineered to stand up to harsh conditions, including coastal conditions



RESISTANT TO MOISTURE DAMAGE



FIRE RESISTANT

Fire protection with up to 60 minute fire resistance when used as part of a fire rated system



COMPLIANCE

BRANZ Appraised



LIGHT WEIGHT

Classified as a lightweight cladding under NZ Building Code



EASY TO CLEAN

Fast and effective using low pressure water and a brush



EASY TO PAINT

Can be painted a wide variety of colours, including the darker shades



EASY TO INSTALL

Easy installation makes Axon™ Panel a fast and effective way to cover your home's exterior



15 YEAR WARRANTY

Backed with a 15 year product warranty





Maintenance

With minimal maintenance you can keep your home looking like new. The following are the best practices for this product to improve its longevity and performance.

- Washing down your exterior every 6-12 months using low pressure water and a brush, and every 3-4 months in extreme coastal conditions (such as high winds and sea spray)
- Clean out your gutters, downpipes and overflow pipes as required
- Cut back vegetation and landscaping which is too close to or touching the Axon™ Panel
- Re-applying exterior protective finishes.
 Always refer to the paint manufacturer for re-coating requirements
- Maintaining the exterior envelope and connections including joints, penetrations, flashings and sealants
- The clearances between the bottom edge of the Axon™ Panel and the ground must always be maintained



