
Stria™ Cladding



New
Fine
Texture





Stria™ Cladding

Stria™ Cladding is an ultra-sleek cladding option that plays with definitive lines and shadows to instantly transform home designs into an extension of your own personal style.

Find inspiration in the versatile elements Stria™ Cladding brings to external walls for dynamic and unique residential and commercial facades that really stand out. Stria™ Cladding has distinctive deep grooved lines and can be laid horizontally or vertically, introducing an interesting design feature to the walls of your home.

Imagine a house that's completely wrapped in Stria™ Cladding where every wall is different, where it's not just the wall style but the colour being changed, and you'll start to see the playful element it brings to your design.

It can be used to create colourful feature walls, full cladding for new builds, cladding for additions and renovations and internal feature walls. Stria™ Cladding is lightweight and durable, making it ideal for overhangs, protective cantilevers and other striking architectural features.

Made from Hardie™ fibre cement, Stria™ Cladding is a durable, low maintenance cladding that can be painted a range of colours, including darker more contemporary shades. Stria™ Cladding is designed to withstand our harsh weather, including coastal conditions.

What is fibre cement?

Engineered for durability, fibre cement is fire resistant, rot resistant and resistant to moisture damage, making it an ideal low maintenance building material. Fibre cement offers both contemporary and flexible design options and is used by many New Zealanders to create stunning homes.

The basic composition of Hardie™ fibre cement building products is Portland cement, ground sand, cellulose fibre, water and proprietary additives, which give the product its strength to stand the test of time.



Global GreenTag™ GreenRate™ Level A and Product Health Declaration™ PHD Platinum Health mean our products have passed the world's toughest standards for health, eco performance and safety.

SMOOTH OR



Stria™ Cladding Smooth 325mm

TEXTURED



Stria™ Cladding Fine Texture 325mm

SMOOTH

Profiles & Sizes

Clean and sleek, Stria™ Cladding Smooth features 15mm wide square-shaped grooves and is the perfect solution for contemporary designs that require a bold but pared-back aesthetic.

325mm WIDE

The narrower lines of the 325mm profile establish a look of modern simplicity and are a great way to make smaller walls appear larger.



405mm WIDE

The modern architectural style of the 405mm panel brings a bold statement to any design. The perfect solution for large scale walls.



Combination

Stria™ Cladding is a panel with a shiplap joint and is available in two profiles. Try combining the 325 and 405mm widths vertically to create an architectural look that's modern and unique.

LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)
3000	325	14
3000	405	14
4200	325	14
4200	405	14



Stria™ Cladding Smooth 405mm



Stria™ Cladding Smooth 405mm





Stria™ Cladding Smooth 405mm, horizontal



Stria™ Cladding Fine Texture 325mm



Stria™ Cladding Fine Texture 325mm, vertical

TEXTURED

Profiles & Sizes


NEW FINE TEXTURE 325mm WIDE

Stria™ Cladding Fine Texture: an extension of our popular Stria™ Cladding range. This new profile features a sharp v-groove combined with an embedded fine texture for a robust look and feel.



Horizontal

Installed horizontally they provide a look reminiscent of masonry with the distinctive lines of large format shiplap boards.

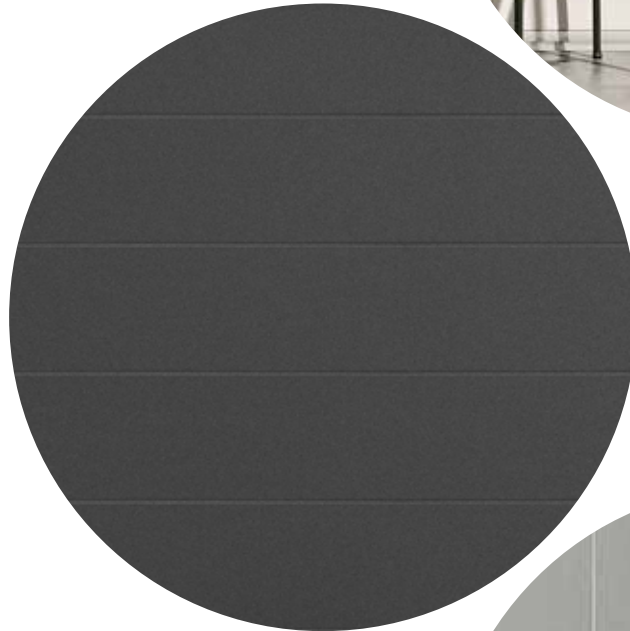

Vertical

A highly versatile cladding solution, equally suited to facades, features and broad walls where tactility is desirable. Vertically install Stria™ Cladding Fine Texture for a more contemporary look.



LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)
3000	325	14
4200	325	14



Features & Benefits



WEATHER RESISTANT

Engineered to stand up to harsh conditions, including coastal conditions



COMPLIANCE

BRANZ appraised and CodeMark certified



EASY TO PAINT

Can be painted a wide variety of colours, including the darker shades



RESISTANT TO MOISTURE DAMAGE



LIGHT WEIGHT

Classified as a lightweight cladding under NZ Building Code



EASY TO INSTALL

Wide panels, combined with interlocking edges allows for quick and easy installation



FIRE RESISTANT

Fire resistance with up to 60 minute fire resistant rating when used as part of a fire rated system



EASY TO CLEAN

Fast and effective using low pressure water and a brush



25 YEAR WARRANTY


Backed with a 25 year product warranty



Care & Maintenance

With minimal maintenance you can help keep your home looking like new. The following are the best practices for this product to help improve its longevity and performance. The extent and nature of maintenance required will depend on the geographical location and exposure of the building. As a guide, it is recommended that the basic normal maintenance tasks for Stria™ Cladding shall include, but not be limited to:

- Washing down your exterior every 6-12 months using low pressure water and a brush, and every 3-4 months in extreme coastal conditions (such as high winds and sea spray)
- Clean out your gutters, downpipes and overflow pipes as required
- Cut back vegetation and landscaping which is too close to or touching the Stria™ Cladding
- Re-applying exterior protective finishes. Always refer to the paint manufacturer for re-coating requirements
- Maintaining the exterior envelope and connections including joints, penetrations, flashings and sealants
- The clearances between the bottom edge of the Stria™ Cladding and the ground must always be maintained
- Remove any snow or ice build up that is in direct contact with the cladding for extended periods

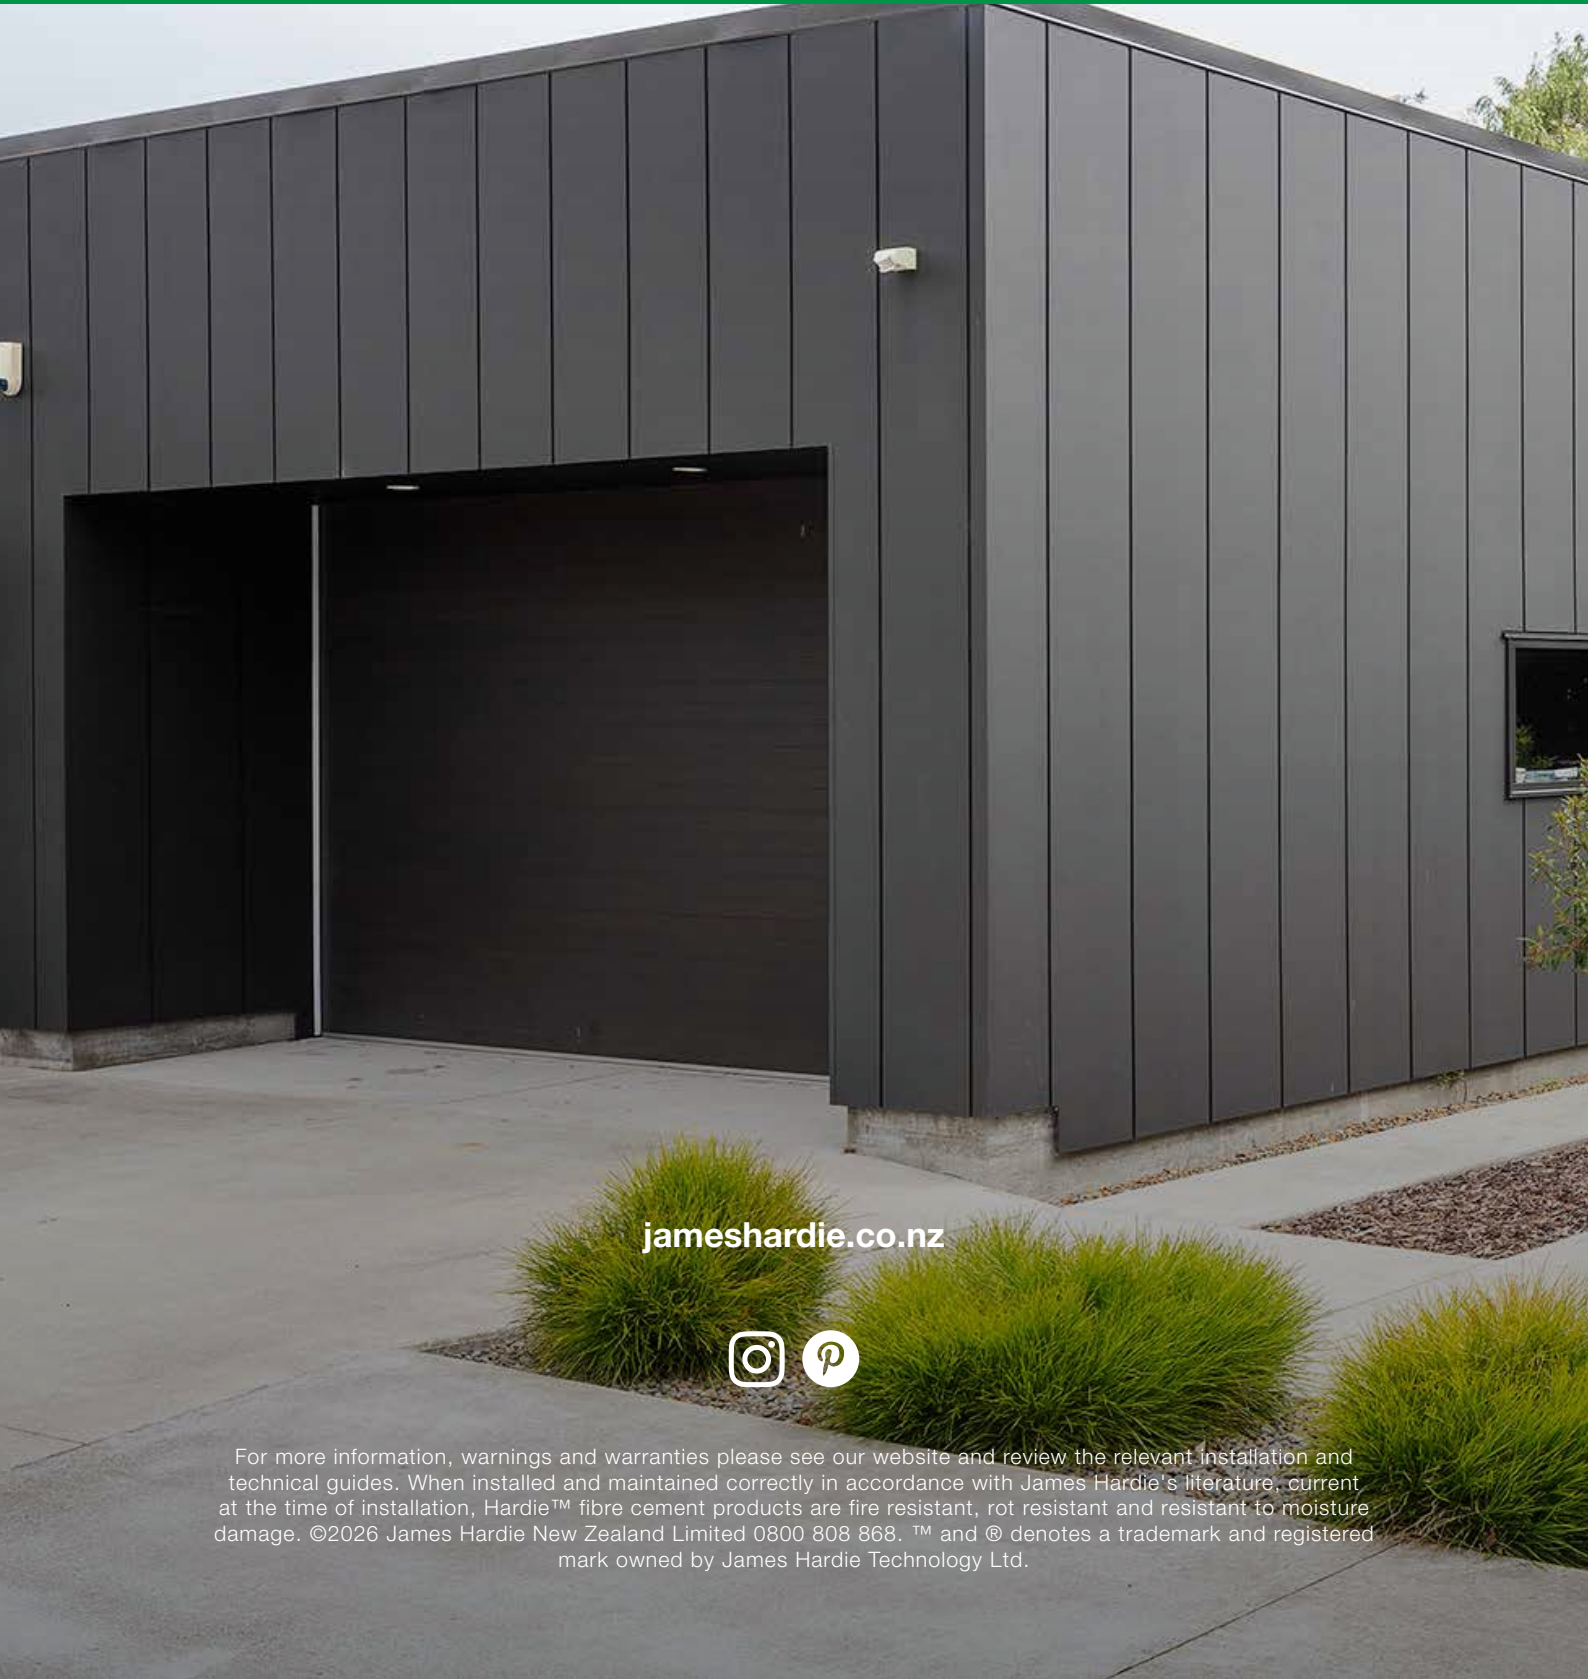

[jameshardie.co.nz](https://www.jameshardie.co.nz)



For more information, warnings and warranties please see our website and review the relevant installation and technical guides. When installed and maintained correctly in accordance with James Hardie's literature, current at the time of installation, Hardie™ fibre cement products are fire resistant, rot resistant and resistant to moisture damage. ©2026 James Hardie New Zealand Limited 0800 808 868. ™ and © denotes a trademark and registered mark owned by James Hardie Technology Ltd.