


Stria™ Cladding







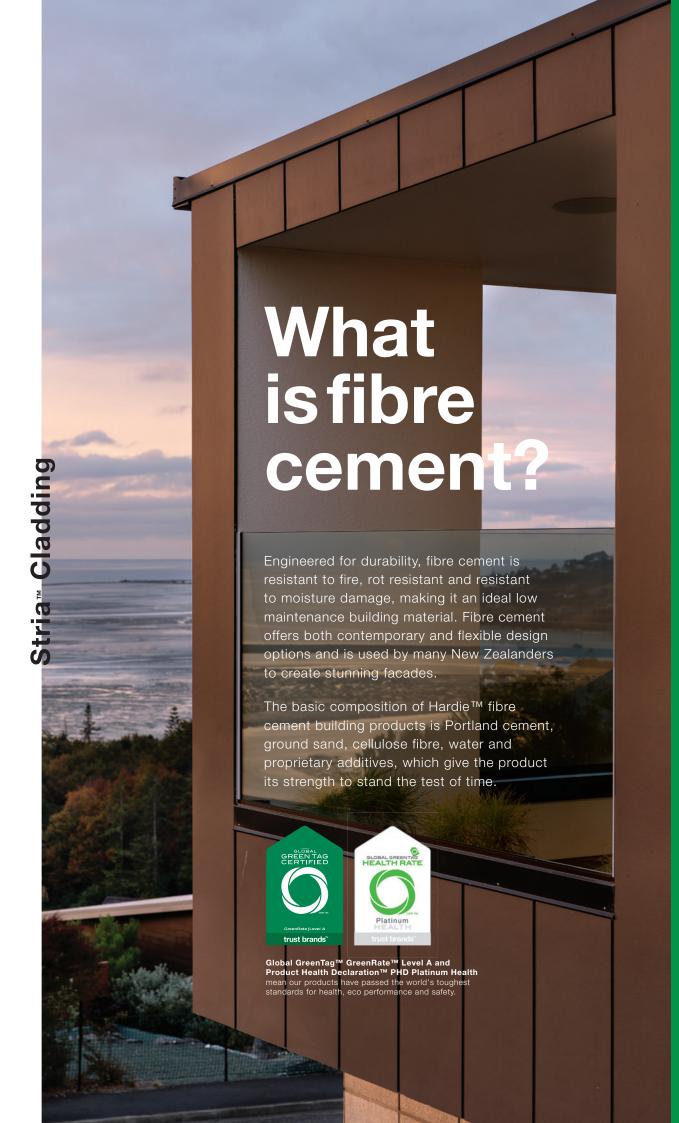

Profiles & Sizes

325mm WIDE

The narrower lines of the 325mm profile establish a look of modern simplicity and are a great way to make smaller walls appear larger.

405mm WIDE

The modern architectural style of the 405mm panel brings a bold statement to any design. The perfect solution for large scale walls.

Combination

Stria™ Cladding is a panel with a shiplap joint and is available in two profiles. Try combining the 325 and 405mm widths vertically to create an architectural look that's modern and unique.

LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)
3000	325	14
3000	405	14
4200	325	14
4200	405	14



Features & Benefits



WEATHER RESISTANT

Engineered to stand up to harsh conditions, including coastal conditions



RESISTANT TO MOISTURE DAMAGE



FIRE RESISTANT

Fire protection with up to 60 minute fire resistance when used as part of a fire rated system



COMPLIANCE

BRANZ appraised and CodeMark certified



LIGHT WEIGHT

Classified as a lightweight cladding under NZ Building Code



EASY TO CLEAN

Fast and effective using low pressure water and a brush



EASY TO PAINT

Can be painted a wide variety of colours, including the darker shades



EASY TO INSTALL

Wide panels, combined with interlocking edges allows for quick and easy installation



25 YEAR WARRANTY

Backed with a 25 year product warranty

Corneroptions



ALUMINIUM TRIM

Use the aluminium trim to achieve a sleek modern corner. The trim comes ready to paint, allowing you to create an almost seamless finish to your final design.

ALUMINIUM TRIM WITH A NEGATIVE DETAIL

Mimic the grooves of the Stria™ Cladding with a negative detail and create an architectural, modern, feature corner for a truly unique look.





Care & Maintenance

With minimal maintenance you can keep your home looking like new. The following are the best practices for this product to improve its longevity and performance.

- Washing down your exterior every 6-12 months using low pressure water and a brush, and every 3-4 months in extreme coastal conditions (such as high winds and sea spray)
- Clean out your gutters, downpipes and overflow pipes as required
- Cut back vegetation and landscaping which is too close to or touching the Stria™ Cladding
- Re-applying exterior protective finishes.
 Always refer to the paint manufacturer for re-coating requirements
- Maintaining the exterior envelope and connections including joints, penetrations, flashings and sealants
- The clearances between the bottom edge of the Stria™ Cladding and the ground must always be maintained



